




1 Forstmann Court  
Clifton, NJ 07011  
Phone: 973.772.6997  
Fax: 973.772.0747  
800.359.8561  
[info@commdevices.com](mailto:info@commdevices.com)  
<http://www.commdevices.com>

**Standard RJ45-DB25 Pinout**  
**9-6-00**

<u>RJ-45</u>		<u>DB-25M/F</u>
1 (Blue)	DSR(out)	6
2 (Orange)	CTS(out)	5
3 (Black)	GRD	7
4 (Red)	TX(in)	2
5 (Green)	RX(out)	3
6 (Yellow)	DCD(out)	8
7 (Brown)	RTS(in)	4
8 (Gray)	DTR(in)	20

**out** – signal is from CDI Device  
**in** – signal from Host Equipment

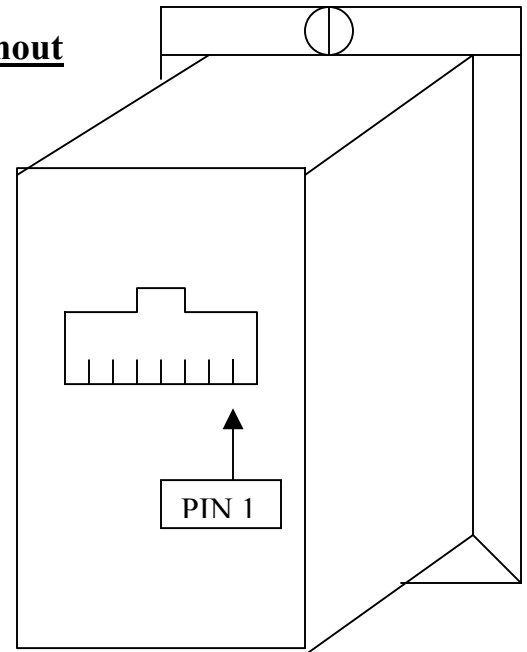

REAR VIEW  
OF  
CONNECTOR

**Testing on the Continuity Tester**

1. CONTINUITY TESTER IN A POSITION. LED # 4 SHOULD BE ON.
2. CONTINUITY TESTER IN B POSITION. LED # 3 SHOULD BE ON.
3. CONTINUITY TESTER IN C POSITION. LED #S 2,7 SHOULD BE ON.
4. CONTINUITY TESTER IN D POSITION. LED #S 5,8,20, SHOULD BE ON.