


Secure Out of Band Management Over Telco and Network

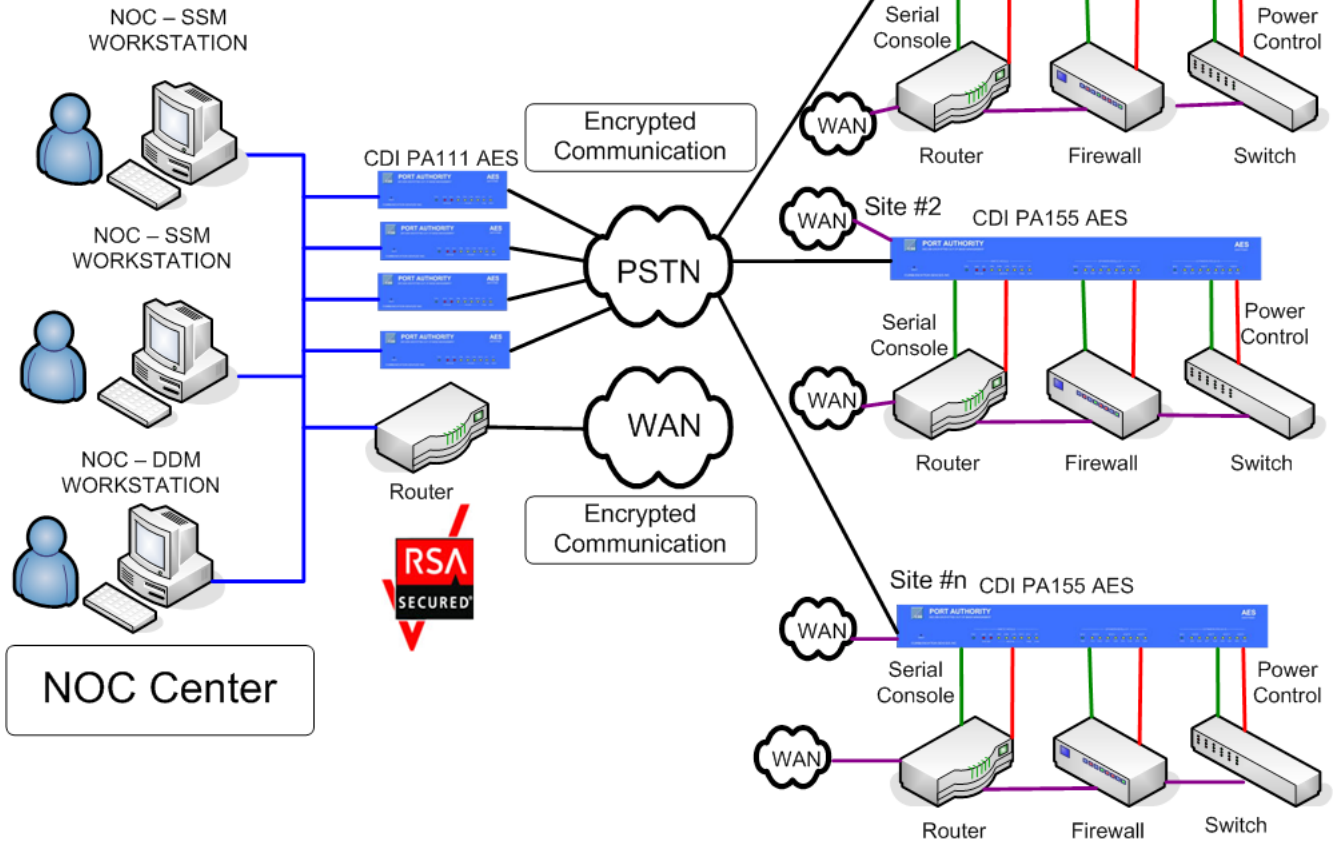

Network Capabilities

The network interface provides in band access for engineers as well as real time reporting and access to the DDM manager. The following protocols are supported.

- Multiple Encrypted Access Sessions
- Remote PPP Access
- Secure Shell (SSH)
- Radius, Syslog, SNMP, Real Time Events
- Real Time Telco Status and HeartBeat

Order info for single and multi-port models

PA-111-SA	Stand Alone, 1 console port 1 power control port	Length 8 inches (20.32 cm) Width 19 inches (48.26 cm) Height 1.75 inches (4.5 cm) Weight 7 pounds (3.17 Kilogram) Power 110VAC 1.5 AMP, 220VAC .75 AMP Misc. NIST AES & TDES, RSA, FCC PART 15,PART 68, CE,UL60950
PA-111-RM	Rack Mount, 1 console port 1 power control port	
PA-155-RM	Rack Mount, 5 console port 5 power control ports	
PA-199-RM	Rack Mount, 9 console port 9 power control ports	
		Global Add -US, -UK, -EU, AU for international power cords