




1 Forstmann Court
 Clifton, NJ 07011
 Phone: 973.772.6997
 Fax: 973.772.0747
 800.359.8561
info@commdevices.com
<http://www.commdevices.com>

KIT-CISCO-CON/AUX-B

Cable pinout

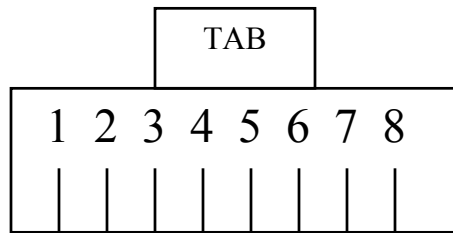

Tab up facing you
 Pin One on the Left.

Looking at end of RJ45

Each end of the Cable needs to be clearly labeled (CDI or Cisco) as this cable will not work when installed backwards

CDI Device
 RJ45 Port

Cisco Con/Aux Port
 RJ45 Port

1	---Blue-----	DSR out	---	N/C
2	---Orange-----	CTS out	---	8
3	---Black-----	GND	---	4
4	---Red-----	RX in	---	3
5	---Green-----	TX out	--	6
6	---Yellow-----	DCD out	--	7
7	---Brown-----	RTS in	---	1
8	---Slate-----	DTR in	---	2

Out – Signal is generated by CDI
 In – Signal is generated by host equipment

CDI Maintenance to Cisco 2500
 Console port or Aux Port